


PRODUCT SPECIFICATION

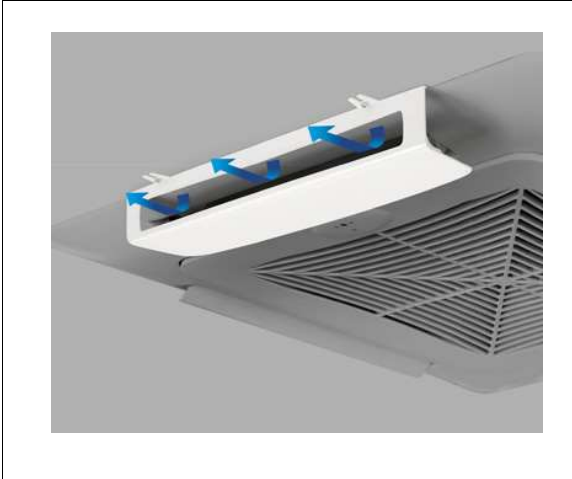

Article code: CLI04702

Description:
Air deflector for "cassette" internal AC unit

APPLICATION

Air deflectors are essential accessories to deflect internal air flow when necessary. Made of white plastic, they are easy and quick to install thanks to the provided screws.

MATERIAL

ABS with UV protection

Batch Information

Characteristic	Unit	Value	Lower Limit	Upper Limit
Batch 219450021G / Quantity 23.750 KG				
aIN (23 Cel)	kJ/m ²	13,6	11,0	
Ball indentation hardness H 30	N/mm ²	108,9	95,0	
MVR (220°C / 10,0 KG)	cm ³ /10	33,8	28,0	45,0

ADVISED RANGE OF TEMPERATURES

Minimum -10°C to Maximum +50°C

COLOURS

White

CHARACTERISTICS

- Quick and easy installation.
- Remove unpleasant air flow.

USE

Like all cases where you need to hole wall, please verify that NO ELECTRICAL WIRE AND OTHER PIPES pass into your work area.

Take out from pack air deflector

Place air deflector on roof on exactly final position and draw centre of two holes using air deflector as reference.

Create holes, screw in fixing air deflector on final position

Downward position of your air conditioner fins and... enjoy fresh air!

MEASUREMENTS

All measurements in mm

