



中国认可  
国际互认  
检测  
TESTING  
CNAS L6478



# TEST REPORT

Reference No..... : WTF23F08175579E  
 Product Name..... : remote control  
 Model No..... : Refer to section 3.2  
 Test specification..... : EN 55032:2015+A11:2020+A1:2020  
 EN 55035:2017+A11:2020  
 Date of Receipt sample .... : 2023-08-14  
 Date of Test..... : 2023-08-14 to 2023-08-16  
 Date of Issue..... : 2023-08-31  
 Test Report Form No. .... : WEI-55032A-05A  
 Test Result..... : **Pass**



**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

**Prepared By:**

**Waltek Testing Group (Foshan) Co., Ltd.**

Address: No.13-19, 2/F., 2nd Building, Sunlink International Machinery City,  
 Chencun, Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398 Fax:+86-757-23811381 E-mail:info@waltek.com.cn

Tested by:

*Leo Feng*

Leo Feng



*Danny Zhou*

Danny Zhou



## 1 Test Summary

EMISSION				
Test Item	Test Standard	Class / Severity	Result	
Radiated Emission, 30MHz to 1000MHz	EN 55032:2015+A11:2020+A1:2020	Table A.4	Pass	
IMMUNITY (EN 55035:2017+A11:2020)				
Test Item	Test Method	Class / Severity	Performance Criteria	Result
Electrostatic Discharge(ESD)	IEC 61000-4-2:2008	±4 Kv Contact ±8 Kv Air	B	Pass
Continuous RF electromagnetic field disturbances	IEC 61000-4-3: 2006+A1+A2	3V/m, 80%, 1kHz, Amp. Mod.	A	Pass

Remark:

- Pass Test item meets the requirement
- Fail Test item does not meet the requirement
- N/A Test case does not apply to the test object
- A.M Amplitude Modulation

# WALTEK



## 2 Contents

	Page
<b>1 TEST SUMMARY .....</b>	<b>2</b>
<b>2 CONTENTS .....</b>	<b>3</b>
<b>3 GENERAL INFORMATION.....</b>	<b>4</b>
3.1 GENERAL DESCRIPTION OF E.U.T. ....	4
3.2 DETAILS OF E.U.T. ....	4
3.3 DESCRIPTION OF SUPPORT UNITS .....	4
3.4 STANDARDS APPLICABLE FOR TESTING .....	4
3.5 TEST FACILITY.....	5
3.6 SUBCONTRACTED.....	5
3.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	5
<b>4 EQUIPMENT USED DURING TEST .....</b>	<b>6</b>
4.1 SOFTWARE LIST .....	7
4.2 MEASUREMENT UNCERTAINTY .....	7
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	7
4.4 DECISION RULE.....	7
<b>5 EMISSION TEST RESULTS .....</b>	<b>8</b>
5.1 RADIATED EMISSION, 30 MHz TO 1GHz.....	8
5.1.1 <i>E.U.T. Operation</i> .....	8
5.1.2 <i>Block Diagram of Test Setup</i> .....	8
5.1.3 <i>Measurement Data</i> .....	8
5.1.4 <i>Corrected Amplitude &amp; Margin Calculation</i> .....	9
5.1.5 <i>Radiated Emission Test Data</i> .....	9
<b>6 IMMUNITY TEST RESULTS.....</b>	<b>11</b>
6.1 PERFORMANCE CRITERIA .....	11
6.2 ELECTROSTATIC DISCHARGE (ESD).....	12
6.2.1 <i>E.U.T. Operation</i> .....	12
6.2.2 <i>Block Diagram of Setup</i> .....	12
6.2.3 <i>Direct Discharge Test Results</i> .....	13
6.2.4 <i>Indirect Discharge Test Results</i> .....	13
6.3 CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES .....	14
6.3.1 <i>E.U.T. Operation</i> .....	14
6.3.2 <i>Block Diagram of Setup</i> .....	14
6.3.3 <i>Test Results</i> .....	15
<b>7 PHOTOGRAPHS – TEST SETUP .....</b>	<b>16</b>
7.1 PHOTOGRAPH – RADIATED EMISSION TEST SETUP, 30MHz TO 1GHz.....	16
7.2 PHOTOGRAPH – ESD IMMUNITY TEST SETUP .....	16
7.3 PHOTOGRAPH – CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES TEST SETUP .....	17
<b>8 PHOTOGRAPHS – CONSTRUCTIONAL DETAILS .....</b>	<b>18</b>
8.1 EUT – EXTERNAL VIEW .....	18



### 3 General Information

#### 3.1 General Description of E.U.T.

<b>Product Name</b> .....	: remote control
<b>Model No.</b> .....	: Refer to section 3.2
<b>Remark</b> .....	: All models have the same circuit diagram and internal construction, only different in appearance. Therefore the EMC tests were performed on model K-660E.

#### 3.2 Details of E.U.T.

Technical Data..... :

Model	Ratings
ACR900W, ACR086L, ACR900E, ACR082, ACR088, ACR820, ACR881, ACR801, AC-188S, AC-199S	Battery 3V
EK-3399E, EK-3399ES	Battery 3V
K-660E, K-380EW, K-390EW, K-3308E, K-1308E, K-3302E, K-1302E, K-2988E, K-2911E, K-2933E+, K-2688E, K-1060E, K-380E, K-809E, K-2048E, K-2098E, K-2080E, K-650E, K-100ES, K-2018E, K-1028E, K-1028EH, K-1028E PRO, K-1038E, K-630E, K-209ES, K-1030E, K-108ES, K-1020E, K-1018E, K-2028E, K-2021ES, K-2012E, K-830ES, K-2012EH, K-1010E, K-2020E, K-920EH, K-100E, K-1000E, K-920ES, K-9098E, K-9099E, K-1068E, K-301E, K-2090E, K-2068E	Battery 3V
Q-001E, Q-12E, Q-988E, Q-008E, Q-1016E	Battery 3V
SMR330S, SMR328S	Battery 3V
W001	Battery 3V

#### 3.3 Description of Support Units

The EUT has been tested as an independent unit. K-660E is the test sample. All tests were performed in the condition of battery 3V.

#### 3.4 Standards Applicable for Testing

The tests were performed according to following standards:

EN 55032:2015+A11:2020 +A1:2020	Electromagnetic compatibility of multimedia equipment — Emission Requirements
EN 55035:2017+A11:2020	Electromagnetic compatibility of multimedia equipment - Immunity requirements



### 3.5 Test Facility

The test facility has a test site registered with the following organizations:

- **ISED – Registration No.: 21895**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Innovation, Science and Economic Development Canada (ISED). The acceptance letter from the ISED is maintained in our files. Registration ISED number: 21895, March 12, 2019

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106, August 16, 2018

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

### 3.6 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes  No

If Yes, list the related test items and lab information:

Test items: ---

Lab information: ---

### 3.7 Abnormalities from Standard Conditions

None.



#### 4 Equipment Used during Test

<input checked="" type="checkbox"/> Radiated Emission (30MHz to 1GHz) 1#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	---	Valid
2.	EMI Test Receiver	R&S	ESR7	101566	Valid
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	Valid
4.	Coaxial Cable (below 1GHz)	H+S	CBL3-NN-12+3 m	214NN320	Valid
<input type="checkbox"/> Radiated Emission (30MHz to 1GHz) 2#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	YIHENG	10m×5.3m×3.5m	YH2021071804	Valid
2.	EMI Test Receiver	R&S	ESR7	102454	Valid
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9163	01418	Valid
4.	Coaxial Cable (below 1GHz)	Times-Microwave Systems	LMR240UF-NMSM-7.5	---	Valid
<input checked="" type="checkbox"/> ESD					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	ESD Simulator	TESEQ	NSG437	521	Valid
<input checked="" type="checkbox"/> Radio-frequency Electromagnetic Fields					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	RF Power Amplifier	OPHIR	5225R	1051/1712	Valid
2.	RF Power Amplifier	OPHIR	5293RE	1051/171	Valid
3.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP9128E-SPECIAL	142	Valid
4.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP 9149	476	Valid
5.	RF signal generator	Agilent	N5181A	MY48180720	Valid
6.	Power meter	RS	NRP6A	101133	Valid
7.	Power meter	RS	NRP6A	101134	Valid

: Not Used

: Used



#### 4.1 Software List

Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission 1#)	FARATRONIC	EZ-EMC	RA-03A1-1
EMI Test Software (Radiated Emission 2#)	FARATRONIC	EZ-EMC	RA-03A1-1
Radiated Immunity Test Software	TONSCEND	JS35-RS	V2.0.1.7

#### 4.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiated Emission	30MHz~1GHz	±4.5dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

#### 4.3 Special Accessories and Auxiliary Equipment

Item	Equipment	Technical Data	Manufacturer	Model No.	Serial No.
1.	/	/	/	/	/

#### 4.4 Decision Rule

Compliance or non-compliance with a disturbance limit shall be determined in the following manner.

**If  $U_{LAB}$  is less than or equal to  $U_{cispr}$ , then**

- Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

**If  $U_{LAB}$  is greater than  $U_{cispr}$ , then**

- Compliance is deemed to occur if no measured disturbance level, increased by  $(U_{LAB} - U_{cispr})$ , exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{LAB} - U_{cispr})$ , exceeds the disturbance limit.



## 5 Emission Test Results

### 5.1 Radiated Emission, 30 MHz to 1GHz

Test Requirement .....	: EN 55032 Annex A.2
Test Method .....	: EN 55032 Annex A.2
Test Limit .....	: Table A.4 of EN 55032
Test Result .....	: Pass
Frequency Range .....	: 30MHz to 1000MHz
Class .....	: Class B

#### 5.1.1 E.U.T. Operation

##### Operating Environment:


Temperature .....	: 23.1°C
Humidity .....	: 52.2%RH
Atmospheric Pressure .....	: 101.2kPa

##### EUT Operation:

Input Voltage .....	: Battery 3V
Operating Mode .....	: Working mode

#### 5.1.2 Block Diagram of Test Setup

The Radiated Emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the CISPR 16-2-3.

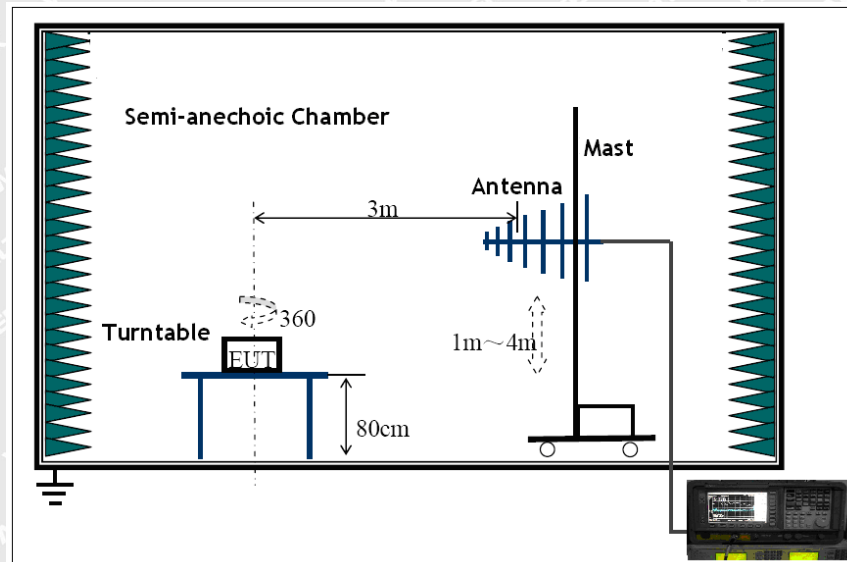

#### 5.1.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for EUT 0°-360°. Quasi-peak measurements were performed if peak emissions were within 6dB of the limit line.



### 5.1.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$


The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B.

The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

### 5.1.5 Radiated Emission Test Data


#### Vertical Polarization:

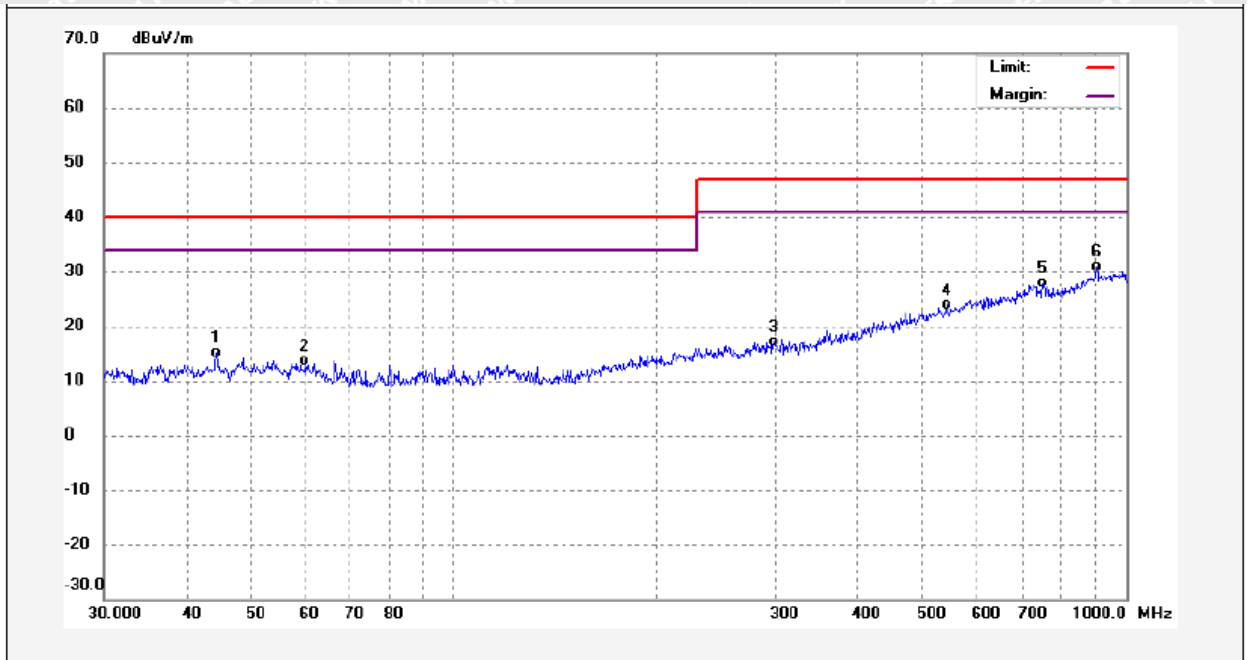

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	44.2597	1.62	13.44	15.06	40.00	-24.94	QP	
2	59.9849	0.59	13.06	13.65	40.00	-26.35	QP	
3	299.0011	0.40	16.61	17.01	47.00	-29.99	QP	
4	540.6137	1.93	21.90	23.83	47.00	-23.17	QP	
5	752.4793	2.07	25.79	27.86	47.00	-19.14	QP	
6	905.8469	3.10	27.68	30.78	47.00	-16.22	QP	



**Horizontal Polarization:**

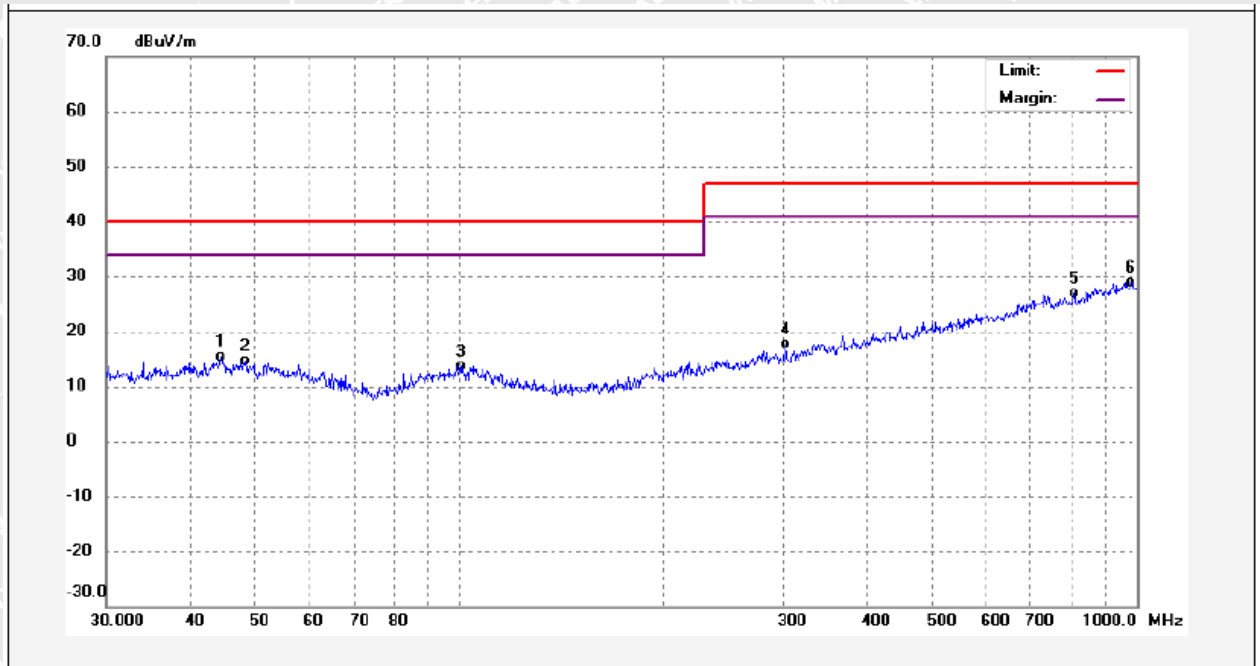

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	44.3840	0.07	15.43	15.50	40.00	-24.50	QP	
2	48.2979	-0.43	15.13	14.70	40.00	-25.30	QP	
3	100.6865	-0.20	13.89	13.69	40.00	-26.31	QP	
4	302.7994	1.87	15.72	17.59	47.00	-29.41	QP	
5	807.9956	1.86	25.06	26.92	47.00	-20.08	QP	
6	980.8987	1.88	27.11	28.99	47.00	-18.01	QP	



## 6 Immunity Test Results

### 6.1 Performance Criteria

**Performance criterion A:** The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

**Performance criterion B:** After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test

**Performance criterion C:** Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

# WALTEK



## 6.2 Electrostatic Discharge (ESD)

<b>Test Requirement</b> .....	: EN 55035
<b>Test Method</b> .....	: IEC 61000-4-2
<b>Test Result</b> .....	: Pass
<b>Discharge Impedance</b> .....	: 330Ω / 150pF
<b>Discharge Voltage</b> .....	: Air Discharge: ±8kV Contact Discharge: ±4kV HCP & VCP: ±4kV
<b>Polarity</b> .....	: Positive & Negative
<b>Number of Discharge</b> .....	: Minimum 10 times at each test point
<b>Discharge Mode</b> .....	: Single Discharge
<b>Discharge Period</b> .....	: 1 second minimum

### 6.2.1 E.U.T. Operation

#### Operating Environment:


<b>Temperature</b> .....	: 21.6°C
<b>Humidity</b> .....	: 52.4%RH
<b>Barometric Pressure</b> .....	: 101.7kPa

#### EUT Operation:

<b>Input Voltage</b> .....	: Battery 3V
<b>Operating Mode</b> .....	: On mode

### 6.2.2 Block Diagram of Setup

The ESD test was performed in accordance with the IEC 61000-4-2.

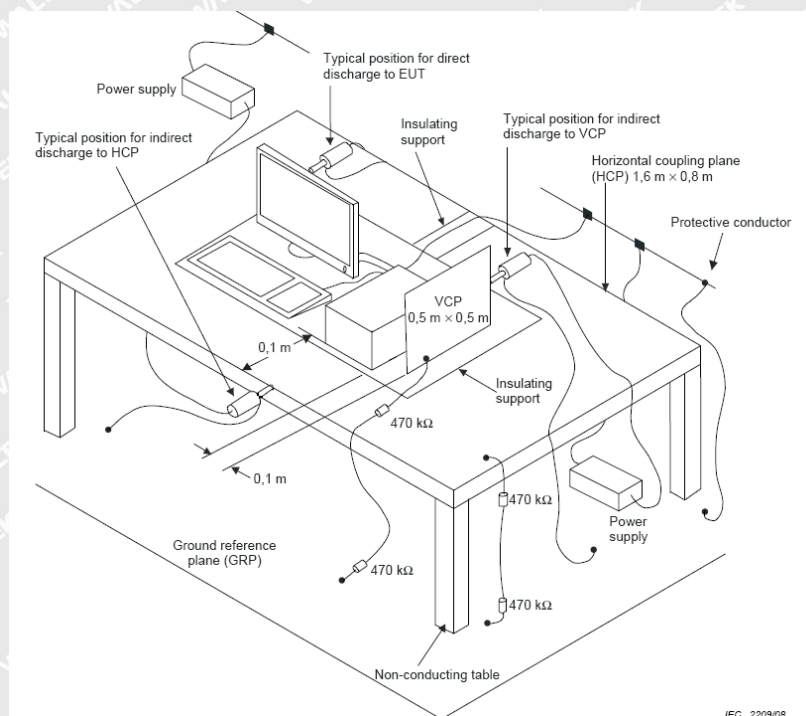





### 6.3 Continuous RF electromagnetic field disturbances

Test Requirement .....	: EN 55035
Test Method .....	: IEC 61000-4-3
Test Result .....	: Pass
Frequency Range .....	: 80MHz to 1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz
Test level .....	: 3V/m
Modulation .....	: 80%, 1kHz Amplitude Modulation.
Face of EUT .....	: Front, Back, Left, Right
Antenna polarisation .....	: Horizontal & Vertical
Test Distance .....	: 3m

#### 6.3.1 E.U.T. Operation

##### Operating Environment:


Temperature .....	: 23.1°C
Humidity .....	: 52.2%RH
Barometric Pressure .....	: 101.3kPa

##### EUT Operation:

Input Voltage .....	: Battery 3V
Operating Mode .....	: On mode

#### 6.3.2 Block Diagram of Setup

The Radio-frequency electromagnetic fields Immunity test was performed in accordance with the IEC 61000-4-3.

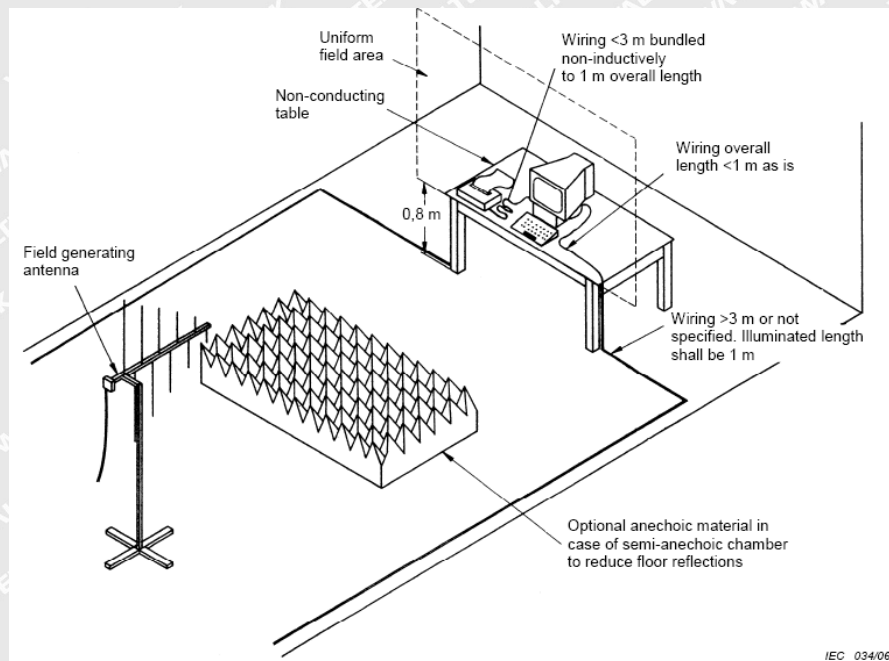



### 6.3.3 Test Results

Frequency	Face of EUT	Antenna polarisation	Test Level	Step Size	Dwell Time	Performance Criterion	Result
80 to 1000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
80 to 1000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
1800MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
1800MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
2600MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
2600MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
3500MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
3500MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
5000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
5000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*

Remark:

- \* During the test no deviation was detected to the selected operation mode(s)



## 7 Photographs – Test Setup

### 7.1 Photograph – Radiated Emission Test Setup, 30MHz to 1GHz



### 7.2 Photograph – ESD Immunity Test Setup





### 7.3 Photograph – Continuous RF Electromagnetic Field Disturbances Test Setup



# WALTEK





## 8 Photographs – Constructional Details

### 8.1 EUT – External View

Test Model K-660E



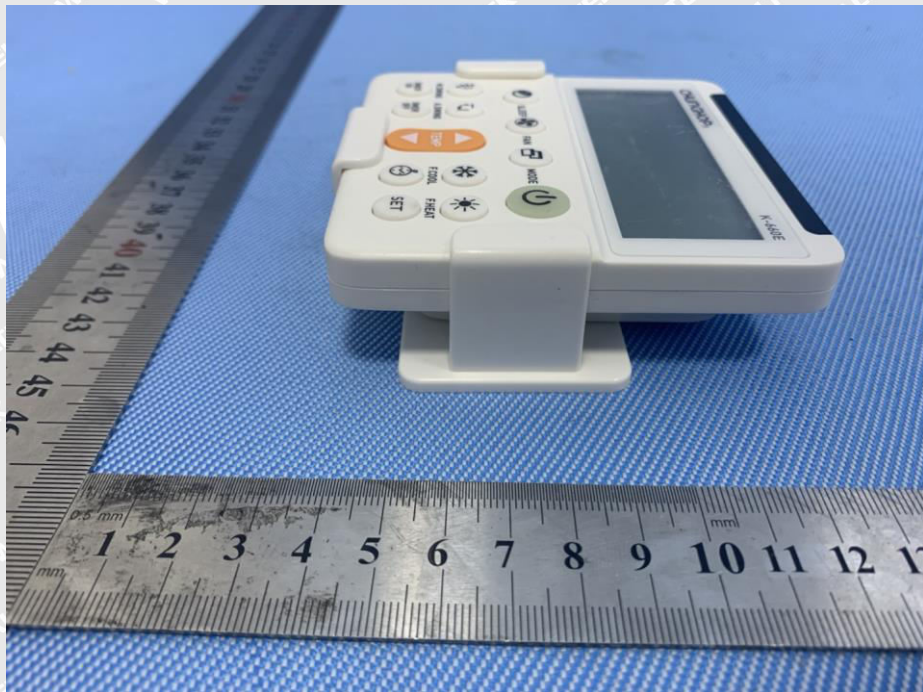

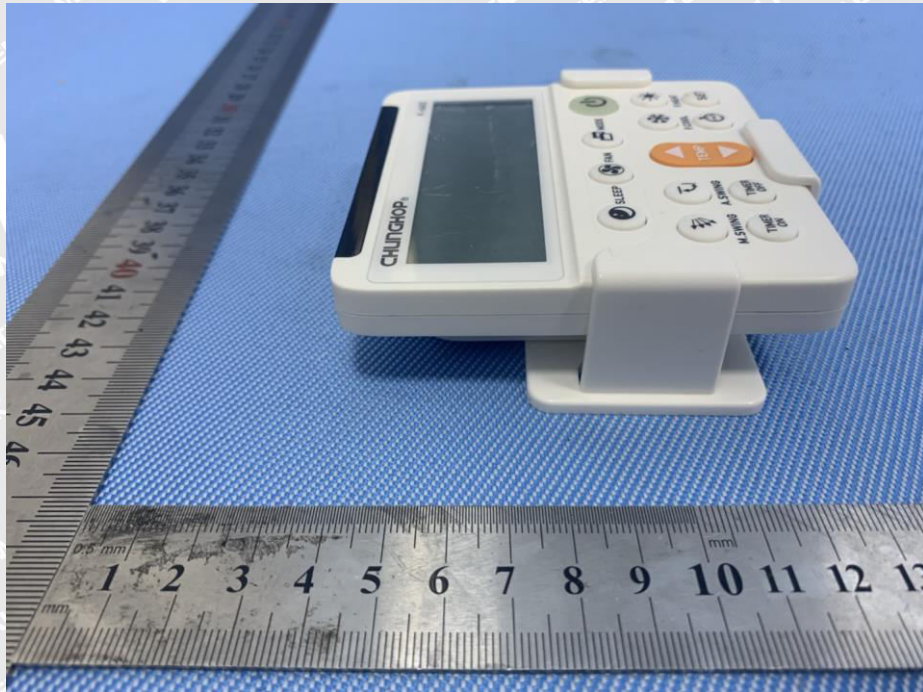



**AC-188S**



**AC-199S**



**EK-3399ES**



**EK-3399E**



**ACR086L**



**ACR082**



**ACR088**



**ACR801**



**ACR820**





**ACR881**



**ACR900E**



**ACR900W**



**SMR330S**



**K-100E**



**K-100ES**



**K-108ES**



**K-209ES**



**K-301E**





**K-380E**



**K-380EW**



**K-390EW**



**K-630E**



**K-650E**



**W001**



**K-809E**



**K-830ES**



**K-920EH**





**K-920ES**



**K-1000E**



**K-1010E**



**K-1018E**



**K-1020E**



**K-1028EH**



**K-1028E PRO**



**K-1028E**



**K-1030E**





**K-1038E**



**K-1060E**



**K-1068E**



**K-1302E**




**K-1308E**



**K-2012EH**



**K-2012E**

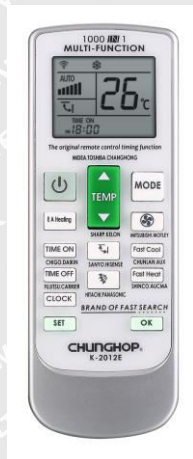

**K-2018E**



**K-2020E**





**K-2021ES**



**K-2028E**



**K-2048E**



**K-2068E**



**K-2080E**



**K-2090E**



**K-2098E**



**K-2688E**



**K-2911E**





**K-2933E+**



**K-2988E**



**K-3302E**



**K-3308E**



**K-9098E**



**K-9099E**



**Q-001E**



**Q-008E**



**Q-12E**





**Q-988E**



**Q-1016E**



**SMR328S**



===== End of Report =====

# WALTEK