


FAN04134 à 48

Pressure switches with internal indicator with non-adjustable differential

Pressure switches for fluids and inert gases. Suitable for autoclaves, control of lubrication circuits, steam boilers, irrigation systems etc.

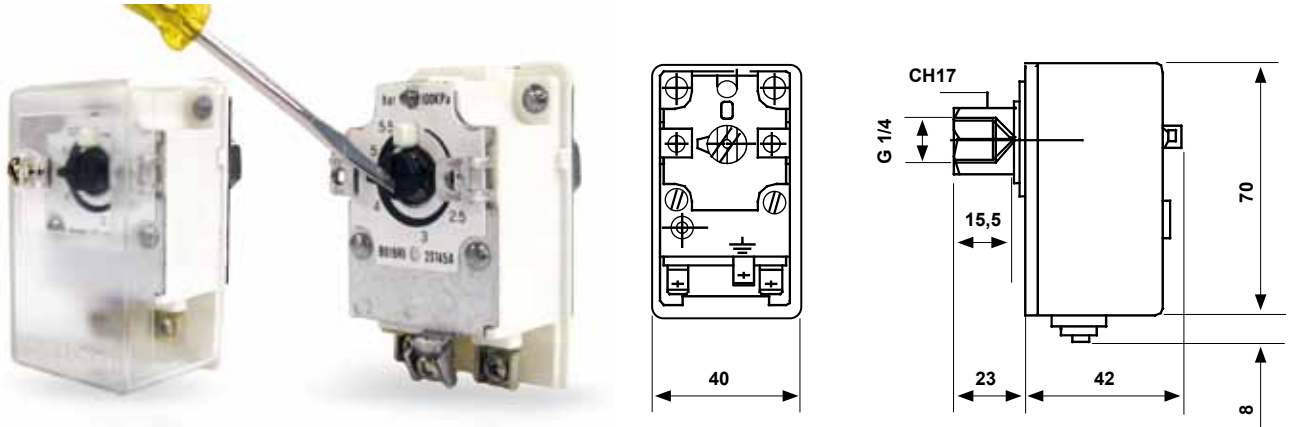


	Range bar	Differential bar	Sensitive element max. pressure bar	Connection G/14	Protection level	Availability
B01ARI	0,7 ÷ 3	0,4	6	flange	IP40	on request
B01BRI	2 ÷ 5,5	0,6	7	flange	IP40	on request
B01CRI	3 ÷ 7	0,6	9	flange	IP40	on request
B01DRI	4 ÷ 15	1	18	flange	IP40	on request
B01A4RI	0,7 ÷ 3	0,4	6	threaded	IP40	on request
B01B4RI	2 ÷ 5,5	0,6	7	threaded	IP40	on request
B01C4RI	3 ÷ 7	0,6	9	threaded	IP40	on request
B01D4RI	4 ÷ 15	1	18	threaded	IP40	on request

1 Bar = 100Kpa *The differential must be deducted from the range value.


ELECTRICAL FEATURES

Snap action SPDT microswitch with AgCdO contacts.



Nominal insulation tension	Ui	380V~		
Continuous duty nominal current	Ith	15A		
Operating nominal current Ie		220V~	250V~	380V~
Resistive load	AC-12	-	10A	10A
Inductive load	AC-15	-	0,2A	1,5A
Continuous current	DC-13	0,2A	-	-

EXAMPLE OF ELECTRICAL WIRING

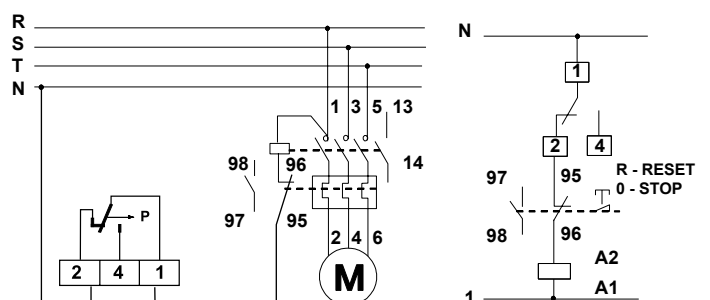

HOMOLOGATION AND STANDARDS

Complies with EN 60947-5-1 standards.

INSTALLATION

Direct installation on the pipe.

In case of fluid temperatures higher than the maximum allowed, connect the pressure switch to the pipe by inserting a metallic spiral between the pressure switch and the pipe to facilitate heat dispersion.

OPERATION

When pressure increases: 1-2 opens, 1-4 closes.

If these devices are used as control pressostats (pressure lack), verify that maximum pressure does not exceed maximum supported sensitive element pressure.

FEATURES

Elements in contact with the fluid are in stainless steel, laser welded.

Base, cover and knob in V0 self-extinguishing, shockproof thermoplastic material.

Output connections with PVC cable gland.

Maximum temperature of the controlled fluid: 120 °C.

Pressure switch body admissible temperature: -35 ÷ 80°C.

Storage and transport temperature: -35 ÷ 80 °C.

Unit weight: 0,15 Kg.